



DLA115B DLA series DLA115BAS

Line Array System

FEATURES

- High quality component, bass-reflex design, full and elastic sound
- Quick setup for hanging, stacking and supporting
- Applications: multifunction halls, lecture halls, auditoriums, churches, and small touring

系统特征

- 高品质单元配置，直射倒相式箱体结构设计，音质丰满且有弹性
- 多种组合使用方式：吊挂、堆码、支撑，安装快捷、安全

适用范围



- 多功能厅、报告厅、礼堂、教堂
- 小型流动演出

DLA115B is a single 15" subwoofer. It features 1x15" 75mm voice coil woofer, bass-reflex design, three-point hanging system matched with DLA206, can be hung, supported and stacked to improve the low frequency performance of the system. The cabinet is made of multilayer composite plywood with wear-resistant polyurea paint. DLA115BAS is equipped with two channels digital amplifier with DSP based on DLA115B to be an active system with DLA206.

DLA115B是一款单15"超低音箱，直射倒相式箱体结构设计，三点吊挂系统与DLA206配合，可吊挂、支撑、堆码，以提升系统低频表现，单元配置：1只15"75芯低音单元；箱体采用多层复合夹板，耐磨聚脲喷涂。DLA115BAS是在DLA115B的基础上配置两通道带DSP的D类功放与DLA206组成有源扩声系统。



CONFIGURATION

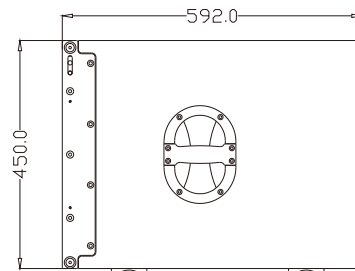

MODEL	DLA115B	DLA115BAS
FREQUENCY RESPONSE(-3dB)	40Hz-300Hz	40Hz-300Hz and 50Hz-20kHz
DRIVERS	1×15"(385mm)/3"voice coil LF	1×15"(385mm)/3"voice coil LF
RATED POWER	400W RMS,1600W peak	900W/4Ω+800W/8Ω
SENSITIVITY	99dB 1watt/1 metre	—
MAXIMUM SPL	125 dB continuous,131 dB peak	125 dB continuous,131 dB peak
IMPEDANCE	8 ohms nominal	—
INPUT CONNECTORS	2×Speakon NL4	INPUT TYPE: Balanced Differential line
PACKAGE SIZE	682mm×520mm×545mm	682mm×520mm×545mm
NET WEIGHT	34 kg/pc	36 kg/pc
GROSS WEIGHT	38 kg/pc	40 kg/pc